


BOSCH

Invented for life

DS940 Series PIR Intrusion Detectors



- ▶ **First Step Processing (FSP)**
- ▶ **Easy to install with flexible mounting options**
- ▶ **Small unobtrusive design**
- ▶ **Broad coverage**
- ▶ **Bracket mounting option**
- ▶ **Draft and insect immunity**

The DS940 series detectors use grooves-in Fresnel lenses to provide superior catch performance. The ease of installation and flexible mounting options provide state-of-the-art detection every time.

Functions

Signal Processing

First Step Processing (FSP) allows virtually instant response to human targets without sacrificing false alarm immunity to other sources. By adjusting its sensitivity based upon signal amplitude, polarity, slope and timing, FSP eliminates the need for the installer to select the sensitivity level for the application. Each sensor is processed individually and both must agree there is an alarm before the alarm relay is activated.

Test Features

Externally visible alarm LED may be disabled after installation.

Draft and Insect Immunity

The sealed optical chamber provides immunity to drafts and insects.

Certifications and Approvals

DS940

Listings and Approvals: UL639, Intrusion Detection Units

CE

DS940T


Listings and Approvals: UL639, Intrusion Detection Units

Afnor (NF, A2P)

CE

Complies with: EN50131-1 grade 2

Installation/Configuration Notes

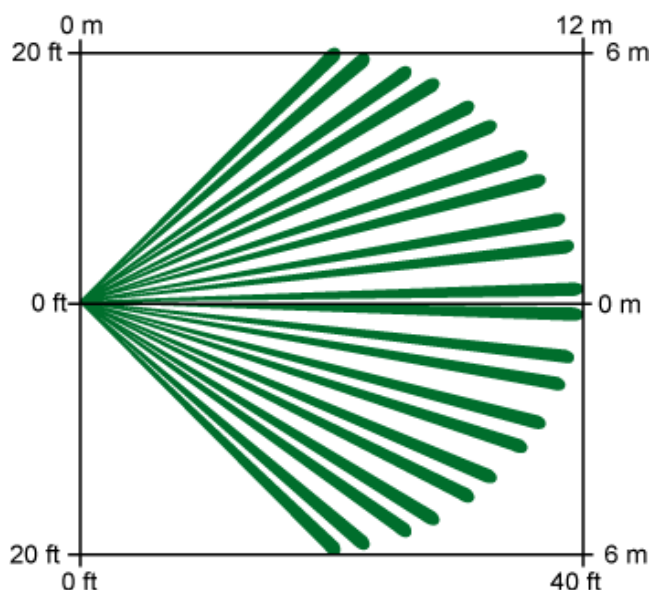

Top View

Standard Broad Coverage: 12 m x 12 m (40 ft x 40 ft)



Side View

Standard Broad Coverage: 12 m x 12 m (40 ft x 40 ft)

Technical Specifications

Enclosure Design

Dimensions: 8.5 cm x 6.9 cm x 4.8 cm
(3.35 in. X 2.75 in. X 1.9 in.)

Material: High impact ABS plastic enclosure

Environmental Considerations

Operating Temperature: -29°C to +49°C (-20°F to +120°F)
For UL Certificated installations, 0°C to +49°C (+32°F to +120°F)

Radio Frequency Interference (RFI) Immunity: No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.

DS940T: Complies with Environmental Class II (EN50130-5)

Mounting

Height Range: 2.25 m to 2.7 m (7.5 ft to 9 ft) recommended

Location: Surface or corner

Outputs

Alarm: Normally-closed reed relay with contacts rated at 125 mA at 28 VDC, maximum; 18 VAC, maximum resistive load only. The relay opens on an alarm condition.

Tamper: DS940T: Cover activated normally-closed tamper switch with contacts rated 125 mA at 28 VDC, maximum.

Power Requirements

Current Draw: 17 mA at 12 VDC

Voltage: 9 VDC to 15 VDC,

Ordering Information

DS940 Wall Mount PIR Detector Provides first step processing, broad coverage, and draft and insect immunity.	DS940
DS940T Wall Mount PIR Detector Includes a tamper switch. Provides first step processing, broad coverage, and draft and insect immunity.	DS940T
DS940T-CHI Wall Mount PIR Detector For use in China. Includes a tamper switch. Provides first step processing, broad coverage, and draft and insect immunity.	DS940T-CHI

Accessories

B335-3 Low-profile Swivel-mount Bracket Plastic, swivel, low profile bracket for walls. The vertical pivot range is +10° to -20°; the horizontal pivot range is ±25°. Shipped in packages of three.	B335-3
--	--------

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by